


### Single Phase Output, Single Enclosure Configuration



**Note**

1. For 20 to 35kVA it is not necessary to utilize all twelve mounting holes.
2. 20 to 40kVA dimension  $F1 = 18.63$  (473)
3. 50 to 60kVA dimension  $F1 = 26.00$  (660)

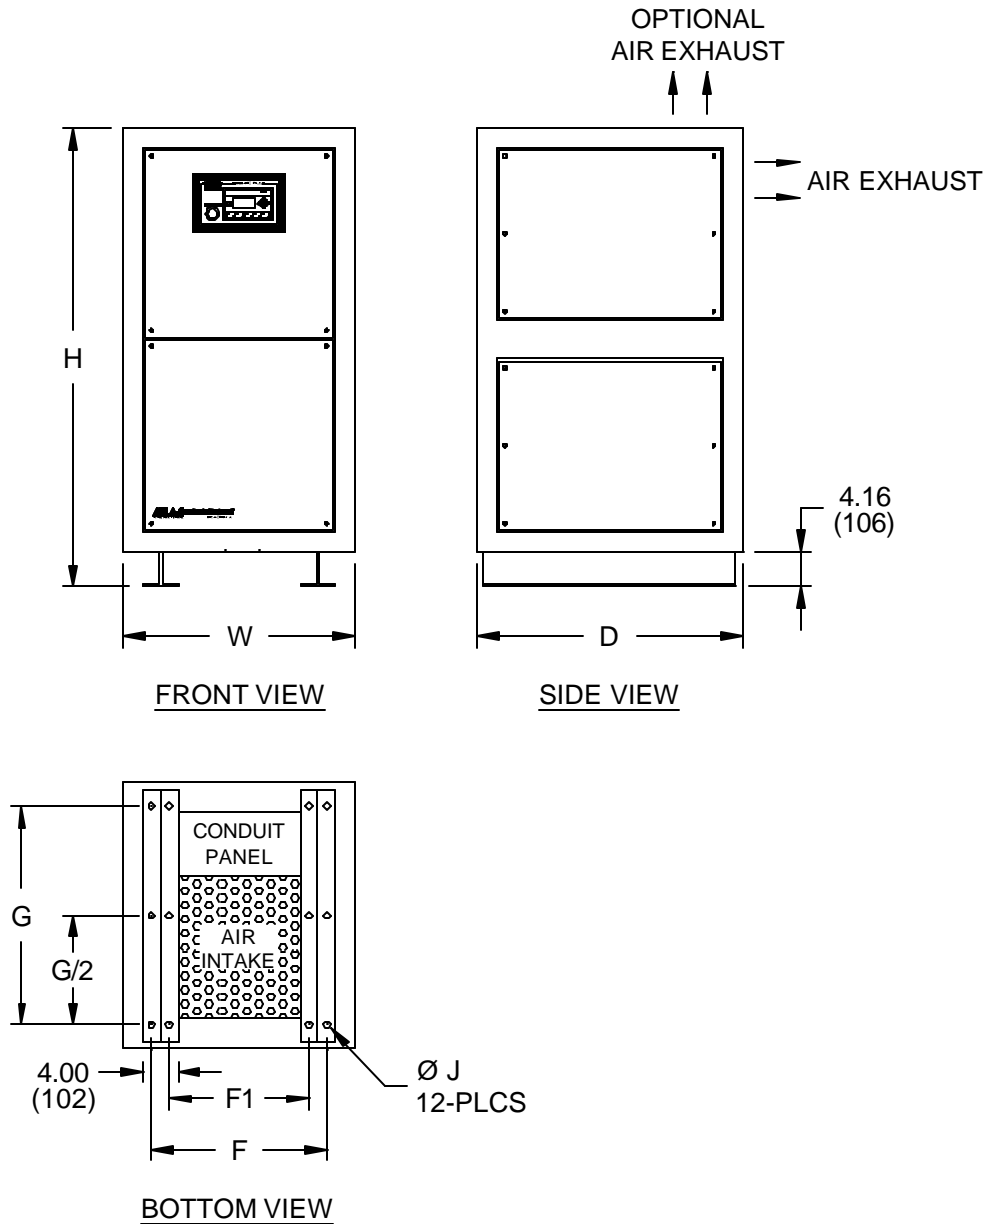

# **ShorPOWER**

## **CLASSIC III 20 - 60kVA**

### **Single Phase Output, Single Enclosure Configuration**

kVA	Dimensions in inches (mm)								Weight
	H	W	D	F	G	J	CFM	BTU/HR	lbs (kg)
20	56.87(1445)	27.50 (699)	31.50 (800)	22.63 (575)	26.13 (664)	0.63 (15.9)	300	4700	1400 (636)
25							400	5700	1440 (655)
30							400	6800	1560 (709)
35							500	7900	1700 (773)
40							600	8900	1845 (839)
50	66.22(1682)	36.00 (914)	36.00 (914)	30.00 (762)	32.63 (829)	0.63 (15.9)	700	11100	2270 (1032)
60							800	13200	2880 (1309)