## Single Phase Output, Single Enclosure Configuration

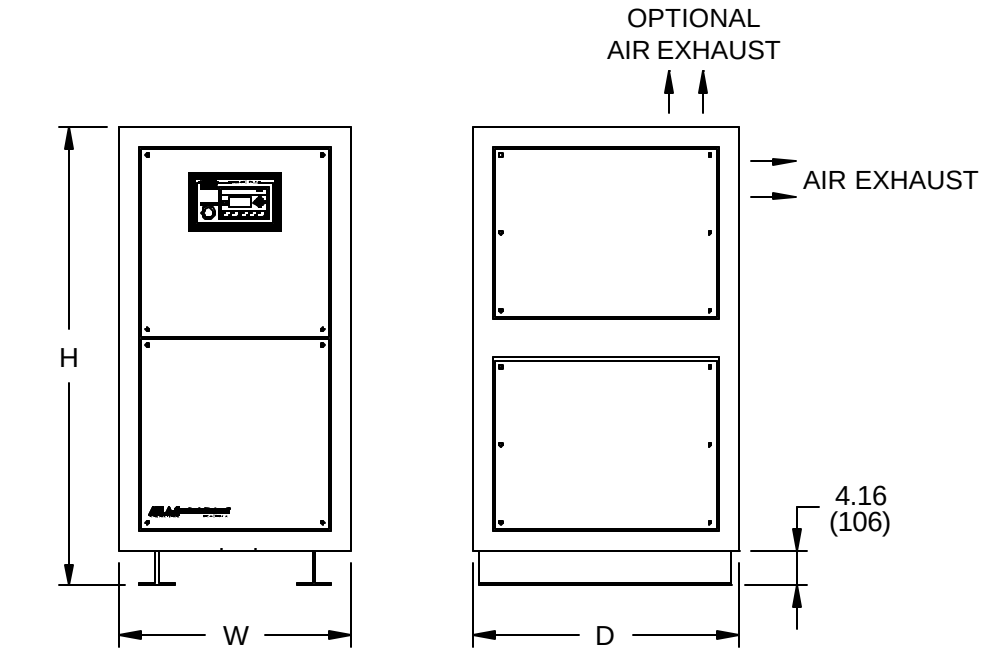


FRONT VIEW SIDE VIEW

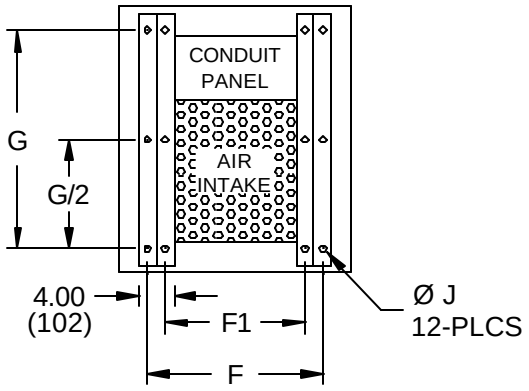


BOTTOM VIEW

Note
1. For 20 to 35kVA it is not necessary to utilize all twelve mounting holes.
2. 20 to 40kVA dimension F1 = 18.63 (473)
3. 50 to 60kVA dimension F1 = 26.00 (660)

## Single Phase Output, Single Enclosure Configuration

| | Dimensions in inches (mm) | | | | | | | | Weight |
|---|---|---|---|---|---|---|---|---|---|
| kVA | H | W | D | F | G | J | CFM | BTU/HR | lbs (kg) |
| 20 | 56.87(1445) | 27.50 (699) | 31.50 (800) | 22.63 (575) | 26.13 (664) | 0.63 (15.9) | 300 | 4700 | 1400 (636) |
| 25 | | | | | | | 400 | 5700 | 1440 (655) |
| 30 | | | | | | | 400 | 6800 | 1560 (709) |
| 35 | | | | | | | 500 | 7900 | 1700 (773) |
| 40 | | | | | | | 600 | 8900 | 1845 (839) |
| 50 | 66.22(1682) | 36.00 (914) | 36.00 (914) | 30.00 (762) | 32.63 (829) | 0.63 (15.9) | 700 | 11100 | 2270 (1032) |
| 60 | | | | | | | 800 | 13200 | 2880 (1309) |