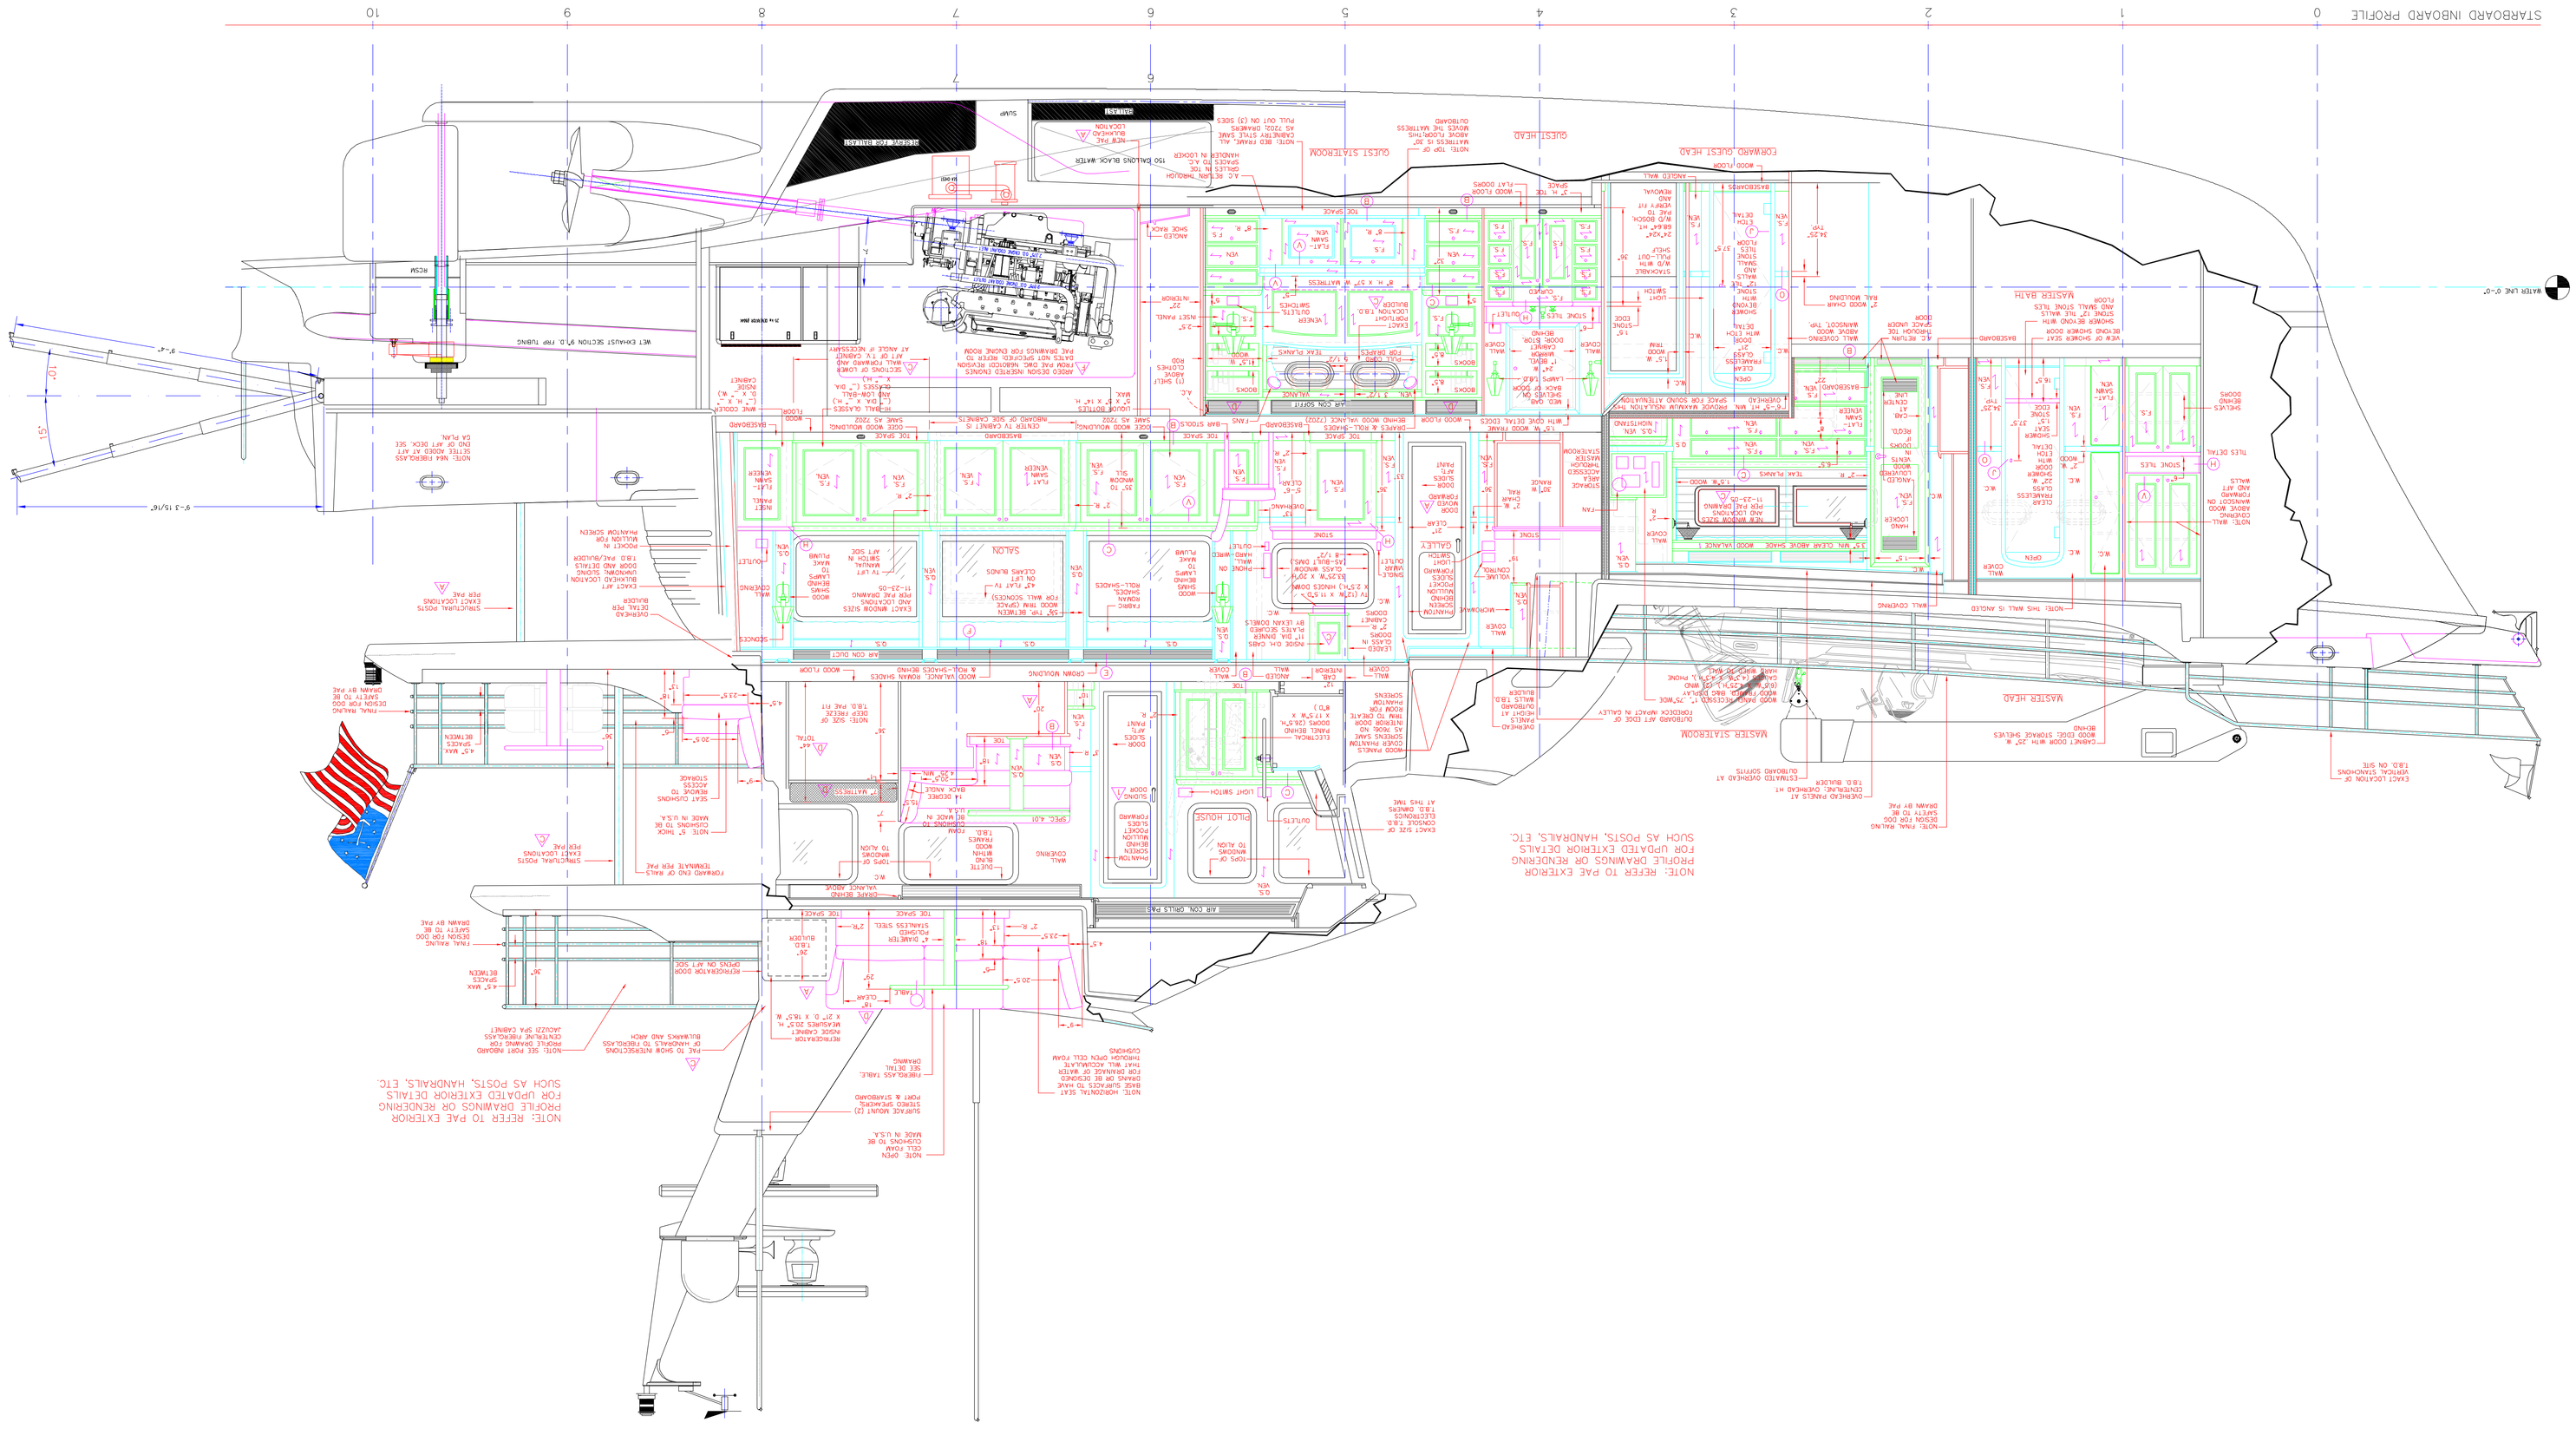


NOTES:

GENERAL NOTES:

1. ALL REMOVABLE OVERHEAD PANELS TO BE PAINTED 3" WIDE "PLANKS LOOK" APPROVED W/OOK UP.
2. FINAL OVERHEAD PANEL BREAKUPS CONFIRMED PER DRAWINGS
3. BUILDER RESPONSIBLE FOR DETERMINING NUMBER OF OUTLETS REQUIRED FOR EQUIPMENT.
4. THERMOSTATS TO BE LOCATED IN CLOSETS
5. DO NOT LOCATE RECESSED HALOGEN OVERHEAD LIGHTS ABOVE DOORS IN LATCHED OPEN POSITIONS.
6. PLEASE REVIEW ALL APPLIANCE SPECIFICATIONS AND REQUIREMENTS PRIOR TO CONSTRUCTION.
7. FABRICATOR TO CONSULT WITH AUDIO AND VIDEO SPECIFICATIONS TO DETERMINE PLACEMENT AND POWER REQUIREMENTS PRIOR TO INSTALLATION OF OUTLETS AND FABRICATION OF CABINETRY.
8. ANY DEVIATION OR SUBSTITUTION FROM INFORMATION PROVIDED HERE SHALL BE ALLOWED WITH THE PRIOR APPROVAL OF ARDEO DESIGN INC.
9. UNLESS OTHERWISE NOTED SWITCHES SHALL BE LOCATED WITH CENTERLINE AT 42.5" (TBD.) ABOVE FINISHED FLOOR
10. BUILDER TO WORK WITH YACHT AND APPROVE STAIRS CONFIGURATIONS.

THIS DRAWING IS INTENDED TO CONVEY STYLING DESIGN INTENT ONLY. BUILDER TO BE RESPONSIBLE FOR ALL ENGINEERING AND CONSTRUCTION DRAWINGS BASED ON DIMENSIONAL INFORMATION PROVIDED BY PACIFIC ASIAN ENTERPRISES, INC. PLEASE VERIFY ACTUAL CONDITIONS AND DIMENSIONS PRIOR TO FABRICATION OR INSTALLATION OF ANY INTERIOR COMPONENTS. NOTIFY ARDEO DESIGN INC. OF ANY DISCREPANCIES FOUND.

BUILDER IS RESPONSIBLE FOR AIR CONDITIONING EQUIPMENT AND DUCTING LAYOUT, LOCATIONS, AND DIMENSIONS REQUIRED TO FABRICATING ENTERTAINMENT EQUIPMENT. BUILDER TO HAVE TV/STEREO EQUIPMENT CUTOUTS.

BUILDER TO HAVE APPLIANCES PRIOR TO LAYING OUT GALLEY CABINETS